



## **Catalogue**

### **Adhesive Division**

Kajaria premium  
range of adhesives,  
grouts & Tile Cleaner

New additions  
White color adhesives


**CX-2 White &  
VX-2 White**

---

**Tile Cleaner TC1**

***Kajaria***



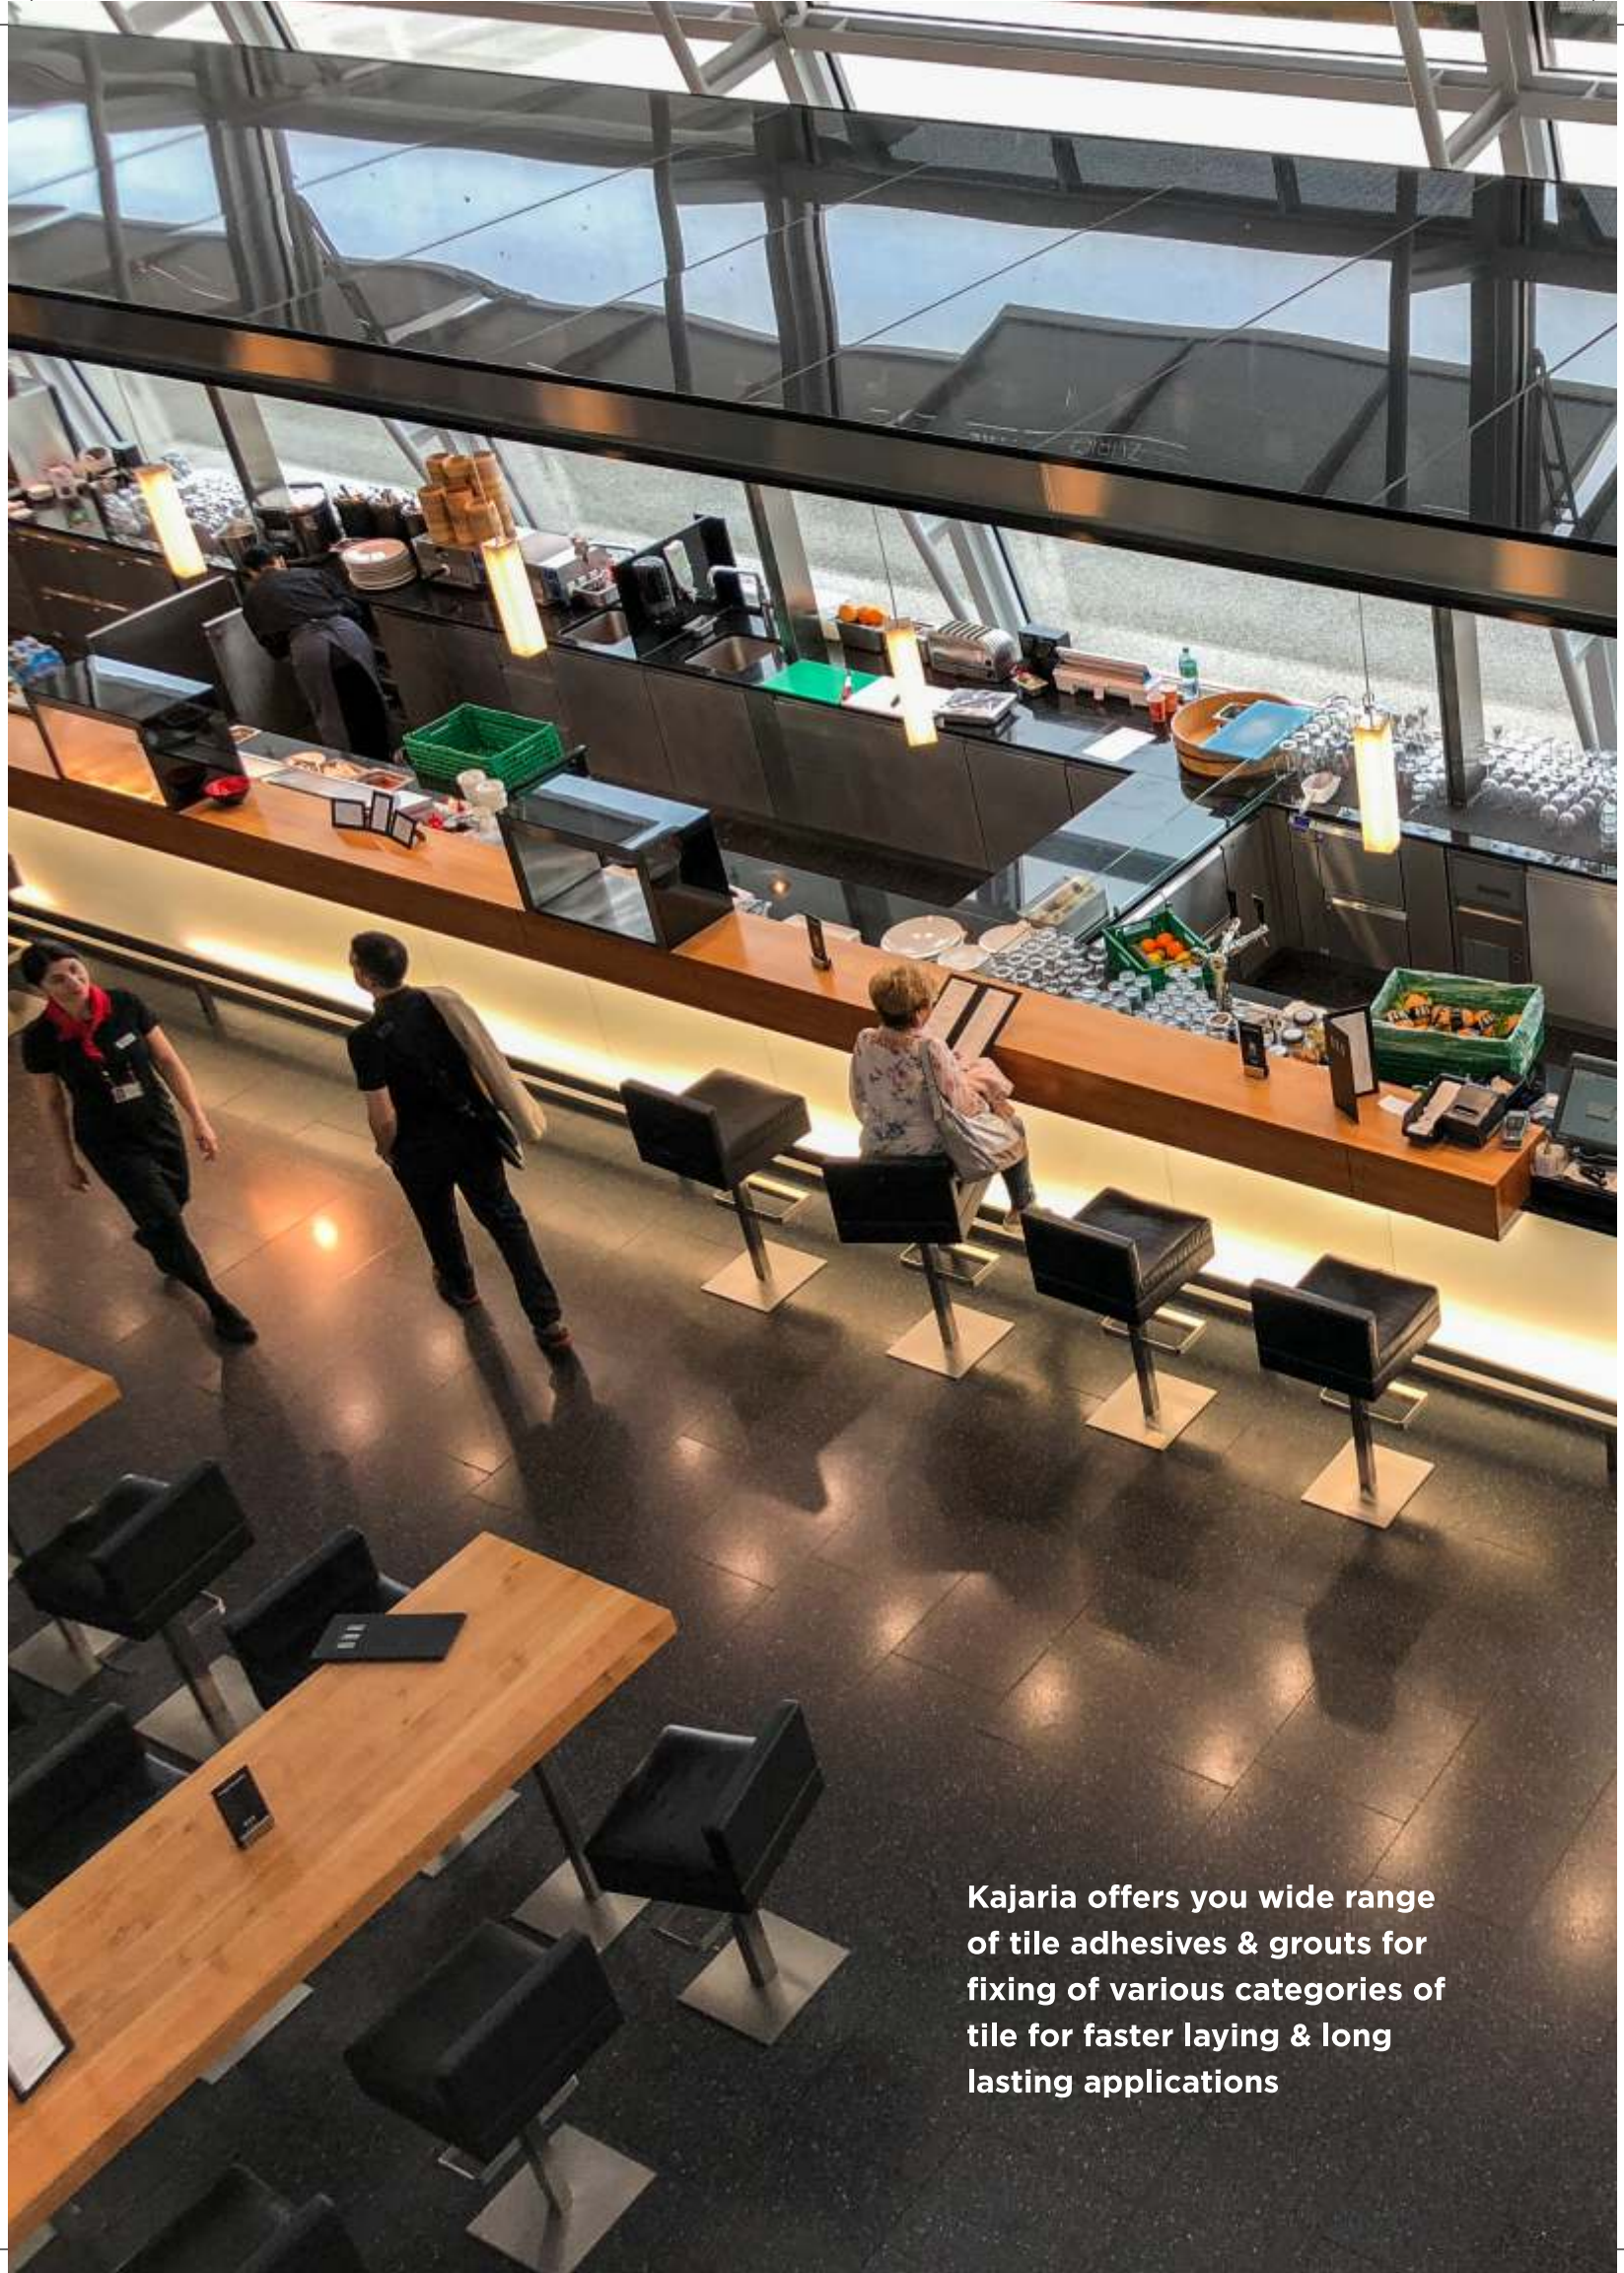

Kajaria offers you wide range of tile adhesives & grouts for fixing of various categories of tile for faster laying & long lasting applications





## Kajaria

The largest manufacturer of ceramic and vitrified tiles in India. Equipped with cutting-edge technology, we at Kajaria strive to deliver quality products and services to our customers. Our team of experts work around the clock to ensure that the quality of our product is never compromised.

Now Introducing

## WHITE COLOR TILE ADHESIVES CX2 WHITE & VX2 WHITE

NEW



## Kajaria Tile Cleaner TC1

A Fast acting acid based tile cleaner designed for daily maintenance of tiles.

NEW





## **Innovative Product Solutions with the Best- Price Performance**

When tiles are fixed to any surface, most vulnerable point is always the bond between the tile and substrate. We eliminate this weakness by significantly improving the bonding strength of the adhesive to both the tile and substrate.



## INGREDIENTS FOR PERFECT RESULTS

# Kajaria

### CX-1

PREMIUM TILE ADHESIVE FOR CERAMIC FLOOR TILES



**CX1** is grey cement based polymer modified quick set tile adhesive meant for Ceramic floor tiles. It gives excellent bond on cementitious surfaces like concrete and plaster. **CX1** Adhesive forms a barrier between two surfaces and has an excellent 'grab' properties.

### VX-1

HIGH PERFORMANCE PREMIUM TILE ADHESIVE FOR ALL KIND OF FLOOR TILES



**VX1** is polymer modified grey cement based tile adhesive specially designed for fixing all kinds of tiles including vitrified tiles, ceramic tiles and large format tiles on internal or external floor surface. **Also suitable for bathroom wall tiles.**

### CX-2 White

NEW

WHITE COLOR PREMIUM TILE ADHESIVE FOR CERAMIC FLOOR TILES



**CX2** is polymer modified white cement based tile adhesive meant for fixing ceramic floor tiles. White colour of **CX2** white protects light base tiles from discoloration along with strong bonding with the surface. **Highly recommended for light base ceramic floor tiles**

### VX-2 White

NEW

HIGH PERFORMANCE WHITE COLOR PREMIUM TILE ADHESIVE FOR ALL KIND OF FLOOR TILES AND MARBLES



**VX2** is polymer modified white cement based tile adhesive suitable for all kinds of floor tiles which includes vitrified tiles, ceramic tiles, large format tiles & marble flooring. White colour of **VX2 white protects light base tiles and marbles from discoloration along with strong bonding with the surface.** Also suitable for bathroom wall tiles.

### EX-5

HEAVY DUTY PREMIUM TILE ADHESIVE FOR INTERIOR & EXTERIOR WALL & FLOOR TILES



**EX-5** is a high strength adhesive. **EX-5** is specially designed for heavy duty tile application. it has superior strength & ideal for all kind of tiles & Stones. **It is also suitable for interior & exterior wall cladding tiles.**

### KE-100

PREMIUM EPOXY GROUT



Kajaria **KE-100** is a Stain free Epoxy grout for floors & Walls. It is a color fast, chemical resistant & 100 % solid epoxy grout suitable for Ceramic tiles, Vitrified tiles, marbles and stones, especially in stain prone areas such as kitchens and washrooms (residential & commercial installations). **Suitable for joints between 2-12 mm.**

### Premium Unsanded Grout

SUPERIOR QUALITY GROUT FOR CLEAN JOINTS



Kajaria **Unsanded Grout** is a superior quality grout. It consist of a carefully prepared blend of white cement, chemical additives and fillers. It is easy to install just mix with water and use. **It is ideal for both floors and walls applications. Available in 20 colours. Suitable for joints between 1-3 mm.**

### TC1 Tile Cleaner

ANTI GERMS & ANTI STAIN

NEW



Kajaria Tile Cleaner **TC1** is a fast acting acid based cleaner for regular cleaning of dirt and stains on tile surface, designed for daily maintenance of tiles.





The tile adhesive is applied in a thin layer by means of a notched trowel.



The tiles are placed with spacers and adjusted accordingly.



To complete the installation, joints are filled with premium Epoxy grout.



## Easy laying of trending Large Tiles

The trend toward large-format tiles is continuing. These tiles create a spacious and luxurious environment. At the same time, they are easier to clean and thus more hygienic than smaller tiles. However, technical challenges also increase as the tiles get larger.

Large-format tiles break more easily. In addition, they are heavier, bulkier and slide off vertical surfaces more easily. Furthermore, they are not always completely flat, just like many substrates. Yet large tiles, in particular, require a level substrate.

Successful laying of large tiles depends on a variety of factors - improving the adhesion and increasing the flexibility of the adhesives with polymer powders plays a key role.

Cement-based tile adhesives adhere very well to porous substrates such as bricks, plasters, earthenware tiles and stoneware tiles. These structures are good anchors for the calcium silicate hydrate needles that form when cement hardens. In contrast, modern porcelain stoneware tiles have extremely smooth surfaces. Tile adhesives for large-format tiles

must be highly modified to attain the necessary tensile adhesion strength coupled with high flexibility.

Large-format tiles require high-quality grouts. Good adhesion at the tile edges, good abrasion resistance and limited water uptake coupled with good water-vapour permeability. High quality grouts play an important role in the laying of large-format tiles: like flexible tile adhesives, they compensate for any stresses that may arise.









# Kajaria

## PREMIUM ADHESIVES

### Fast and Economical

Tile adhesive can be easily applied over large areas with a notched trowel. Then the tiles can be adjusted gently after laying to produce a uniform adhesive bed.

### Easy to work with

High-quality tile adhesives for wall application have good non-s slump properties. The freshly laid tiles therefore do not slip on the wall. It is thus possible to lay the tiles from top to bottom without using spacers. This makes it easier to produce a uniform pattern.

### Excellent Results

Advanced premium adhesives are so easy to mix and install that good results are consistently achieved. Irrespective of the tile material or the substrate, the tile adhesive can be custom-mixed for the particular tile type and substrate.

### Perfect Finish



Resistant to  
Stains and Seepage



Water  
Resistant



Saves Time  
*Surface ready to use  
within 24 hours*



High Bond  
Strength



No Hollowness between  
Tile and Substrate



Can be used directly  
on any surface\*



White Adhesive specially  
for light base tile

\*not suitable for surfaces subject to vibration like plywood, metal, glass, gypsum boards, fibre cement slabs & smooth pre-fabricated concrete.



CX-1

PREMIUM TILE ADHESIVE  
FOR CERAMIC FLOOR  
TILES

Product Description:

**CX1** is grey cement based polymer modified quick set tile adhesive. It gives excellent bond on cementitious surfaces like concrete and plaster. **CX1** Adhesive forms a waterproof barrier between two surfaces and has an excellent 'grab' properties.



Pack Size:

20 kg.

Color

Grey

Shelf Life:

1 year in dry unopened bags.

Coverage (in sq. mtr.)

4-5 Sq. mtr. / 20 Kg bag at 3 mm thickness.

Applications:

For fixing all types of ceramic tiles on interior floor surfaces.

Advantages:

- Ready to use. Needs only mixing with water.
- Flexible, shock and Impact resistant.
- Fast and economical.
- High bond strength.
- Suitable for ceramic floor tiles.

IS : 15477



CM/L 9566705






CX-1

Technical Data: (Type-1)

Density	1.79 kg/litre Approx.
Pot Life	3-4 hrs Approx.
Open Time	22 minutes Approx.
Adjustability	21 minutes Approx.
Setting Time	Approx. 1 Day
Full Strength	Approx. 14 Days
Tensile Strength	841 N Approx.
Shear Strength	9.4 KN Approx.

Method of Application:

1




Remove all Dust, Water, Oil & Sealers from Surface/ Substrate.

2




Add 5 to 6\* ltrs water in-to empty bucket.

3



Add 20 Kg **CX1** Adhesive in-to water and mix it till attains Uniform Paste.

4




Slake the Material for 5 to 10 minutes.

5




Again Mix the material then take the material on notch trowel.

6




Use flat side of the trowel and spread the adhesive uniformly.

7




Comb the adhesive with the help of Notch trowel.

8




Spread the material backside of the tile also ( If tile size is More than 12"X12").

9




Press the tiles firmly into position by Twisting Action.

10




Press the tile gently with help of Wooden Hammer to make uniform tile surface.

11




Clean the Tile surface with wet Cloth.

12



For Foot Traffic wait up to 24 Hrs.

13



After 24 Hrs you can do the grouting.

\* The POWDER: LIQUID ratio may vary according to the job conditions



# VX-1

## HIGH PERFORMANCE PREMIUM TILE ADHESIVE FOR ALL KIND OF FLOOR TILES

### Product Description:

**VX1** is polymer modified grey cement based tile adhesive specially designed for heavy duty applicants for fixing vitrified tiles & large size tiles on floor surfaces. This highly flexible adhesive also has an excellent waterproofing ability. When properly applied, it takes care of hollowness problem.



### Pack Size:

20 kg.

### Color

Grey

### Shelf Life:

1 year in dry unopened bags.

### Coverage (in sq. mtr.)

4-5 Sq. mtr. / 20 Kg bag at 3 mm thickness.

### Applications:

For vitrified & ceramic tiles and large format tiles on floor surfaces.

### Advantages:

- Ready to use. Needs only mixing with water.
- Also suitable for Marbles and tile on tile application.
- Can also we use for internal wall tile
- Saves time as floors are ready to be used after 24 hours.
- Excellent adhesion & low shrinkage.

IS : 15477



CM/L 9566705






VX-1

Technical Data: (Type-2)

Density	1.7 kg/litre Approx.
Pot Life	3-4 hrs Approx.
Open Time	23 minutes Approx.
Adjustability	22 minutes Approx.
Setting Time	Approx. 1 Day
Full Strength	Approx. 14 Days
Shear Strength	12 KN Approx.


Method of Application:

1




Remove all Dust, Water, Oil & Sealers from Surface/ Substrate.

2




Add 5 to 6\* ltrs water in-to empty bucket.

3




Add 20 Kg **VX1** Adhesive in-to water and mix it till attains Uniform Paste.

4




Slake the Material for 5 to 10 minutes.

5




Again Mix the material then take the material on notch trowel.

6




Use flat side of the trowel and spread the adhesive uniformly.

7




Comb the adhesive with the help of Notch trowel.

8




Spread the material backside of the tile also ( If tile size is More than 12"X12").

9




Press the tiles firmly into position by Twisting Action.

10




Press the tile gently with help of Wooden Hammer to make uniform tile surface.

11




Clean the Tile surface with wet Cloth.

12



For Foot Traffic wait up to 24 Hrs.

13



After 24 Hrs you can do the grouting.

\* The POWDER: LIQUID ratio may vary according to the job conditions



Introducing

**CX-2 White**

NEW

# WHITE COLOR PREMIUM TILE ADHESIVE FOR CERAMIC FLOOR TILES

## Product Description:

**CX2 White** is white cement based polymer modified quick set tile adhesive. It gives excellent bond on cementitious surfaces like concrete and plaster. **CX2 White** Adhesive forms a waterproof barrier between two surfaces and has an excellent 'grab' properties. **Highly recommended for light base Ceramic floor tiles**



## Pack Size:

20 kg.

## Color

White

## Shelf Life:

1 year in dry unopened bags.

## Coverage (in sq. mtr.)

4-5 Sq. mtr. / 20 Kg bag at 3 mm thickness.

## Applications:

For fixing all kind of ceramic floor tile. specially recommended for light base ceramic floor tile to give them more brightness & shine

## Advantages:

- Ready to use. Needs only mixing with water
- Flexible, shock and Impact resistant.
- Fast and economical.
- High bond strength.
- Highly effective for light base ceramic floor tiles
- Protect light base ceramic tile from discoloration.

IS : 15477



CM/L 9566705





CX-2 White

Technical Data: (Type-1)

Density	1.79 kg/litre Approx.
Pot Life	3-4 hrs Approx.
Open Time	22 minutes Approx.
Adjustability	21 minutes Approx.
Setting Time	Approx. 1 Day
Full Strength	Approx. 14 Days
Tensile Strength	841 N Approx.
Shear Strength	9.4 KN Approx.


Method of Application:

1




Remove all Dust, Water, Oil & Sealers from Surface/ Substrate.

2




Add 5 to 6\* ltrs water in-to empty bucket.

3




Add 20 Kg CX2 White Adhesive in-to water and mix it till attains Uniform Paste.

4




Slake the Material for 5 to 10 minutes.

5




Again Mix the material then take the material on notch trowel.

6




Use flat side of the trowel and spread the adhesive uniformly.

7




Comb the adhesive with the help of Notch trowel.

8




Spread the material backside of the tile also ( If tile size is More than 12"X12").

9



Press the tiles firmly into position by Twisting Action.

10




Press the tile gently with help of Wooden Hammer to make uniform tile surface.

11




Clean the Tile surface with wet Cloth.

12



For Foot Traffic wait up to 24 Hrs.

13



After 24 Hrs you can do the grouting.

\* The POWDER: LIQUID ratio may vary according to the job conditions



Introducing

**VX-2 White**

NEW

**HIGH PERFORMANCE  
WHITE COLOR PREMIUM  
TILE ADHESIVE FOR ALL  
KIND OF FLOOR TILES  
AND MARBLES**

**Product Description:**

**VX2 White** is polymer modified white cement based tile adhesive specially designed for heavy duty applicants for fixing vitrified tiles & large size tiles on floor surfaces. This highly flexible adhesive also has an excellent waterproofing ability. When properly applied, it takes care of hollowness problem. **Highly recommended for light base internal wall & floor tile.**



**Pack Size:**

20 kg.

**Color**

White

**Shelf Life:**

1 year in dry unopened bags.

**Coverage (in sq. mtr.)**

4-5 Sq. mtr. / 20 Kg bag at 3 mm thickness

**Applications:**

White color adhesive specially recommended for all kinds of floor tiles & marble

**Advantages:**

- Ready to use. Needs only mixing with water.
- Also suitable for Marbles and tile on tile application.
- Can also we use for internal wall tile
- Saves time as floors are ready to be used after 24 hours.
- Excellent adhesion & low shrinkage.
- Very effective for light base tiles & Marbles.
- Protect light base tiles from discoloration.

IS : 15477



CM/L 9566705






VX-2 White

Technical Data: (Type-2)

Density	1.7 kg/litre Approx.
Pot Life	3-4 hrs Approx.
Open Time	23 minutes Approx.
Adjustability	22 minutes Approx.
Setting Time	Approx. 1 Day
Full Strength	Approx. 14 Days
Shear Strength	12 KN Approx.


Method of Application:

1




Remove all Dust, Water, Oil & Sealers from Surface/ Substrate.

2




Add 5 to 6\* ltrs water in-to empty bucket.

3




Add 20 Kg **VX2** White Adhesive in-to water and mix it till attains Uniform Paste.

4




Slake the Material for 5 to 10 minutes.

5




Again Mix the material then take the material on notch trowel.

6




Use flat side of the trowel and spread the adhesive uniformly.

7




Comb the adhesive with the help of Notch trowel.

8




Spread the material backside of the tile also ( If tile size is More than 12"X12").

9




Press the tiles firmly into position by Twisting Action.

10




Press the tile gently with help of Wooden Hammer to make uniform tile surface.

11




Clean the Tile surface with wet Cloth.

12



For Foot Traffic wait up to 24 Hrs.

13



After 24 Hrs you can do the grouting.

\* The POWDER: LIQUID ratio may vary according to the job conditions



# EX-5

## HEAVY DUTY PREMIUM TILE ADHESIVE FOR INTERIOR & EXTERIOR WALL & FLOOR TILES

### Product Description:

When performance matters, professionals choose technically advanced solution for excellent adhesion. **EX-5** is a high strength polymer modified adhesive. **EX-5** is specially designed for heavy duty tile application.

**It has superior strength and is ideal for wall cladding tiles, large format vitrified & ceramic tiles on internal & external floors.**

### Features

- Simply mix with water and it is ready to use.
- No curing required
- Water resistant.
- High Strength adhesive.



### Pack Size:

20 kg.

### Color

Grey

### Shelf Life:

1 year in dry unopened bags.

### Coverage (in sq. mtr.)

4-5 Sq. mtr. / 20 Kg bag at 3 mm thickness

### Applications:

Suitable for exterior & interior surfaces in residential buildings for both floor & wall surfaces.

### Advantages:

- Suitable for all types of tiles for both interior & exterior solution.
- Excellent tensile & shear adhesion.
- Heat & weather resistant.
- Thermal Insulation.

IS : 15477



CM/L 9566705




EX-5

Technical Data: (Type-1)

Density	1.79 kg/litre Approx.
Pot Life	3-4 hrs Approx.
Open Time	25 minutes Approx.
Adjustability	23 minutes Approx.
Setting Time	Approx. 1 Day
Full Strength	Approx. 14 Days
Tensile Strength	841 N Approx.
Shear Strength	9.4 KN Approx.


Method of Application:

1




Remove all Dust, Water, Oil & Sealers from Surface/ Substrate.

2




Add 5 to 6\* ltrs water in-to empty bucket.

3




Add 20 Kg **ex5** Adhesive in-to water and mix it till attains Uniform Paste.

4




Slake the Material for 5 to 10 minutes.

5




Again Mix the material then take the material on notch trowel.

6




Use flat side of the trowel and spread the adhesive uniformly.

7




Comb the adhesive with the help of Notch trowel.

8




Spread the material backside of the tile also ( If tile size is More than 12"X12").

9




Press the tiles firmly into position by Twisting Action.

10




Press the tile gently with help of Wooden Hammer to make uniform tile surface.

11




Clean the Tile surface with wet Cloth.

12



For Foot Traffic wait up to 24 Hrs.

13



After 24 Hrs you can do the grouting.

\* The POWDER: LIQUID ratio may vary according to the job conditions


\*\*For exterior elevation tiles, add latex base adhesive mixture"



# Comparison betweenTraditional Cement Sand Mortar/Non branded Tile adhesive vs. Kajaria premium Tile Adhesive

Traditional cement Sand Mortar /non branded tile adhesive	Kajaria Premium Tile Adhesive
Slow Fixing	Faster Fixing
Curing Required	Curing Not Required
Poor Workability	Good Workability
Typical Application	Easy to Apply
Short Open Time And Adjustability	Adequate Open Time and Adjustability
Poor Water Retention	Good Water Retention
Very Low Bond Strength	High Bond Strength
Hollowness Problem	No Hollowness Between Tile and Substrate
Required Bed Thickness 20-30 Mm	3-6mm Thickness Adequate Mostly
Add More Weight and Thickness	Reduced Weight & Thickness of Structure
Not Water Resistant	Water Resistant
Chipping Required	Can be Use Directly on Any Surface
Stains, Seepage, & Discolouration Is Possible.	Resistant to Stains, Seepage & Discolouration




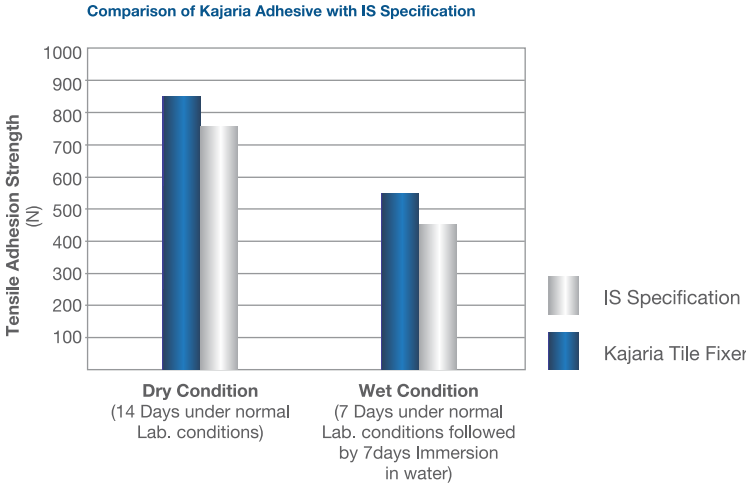

Tensile Adhesive strength (N)  
for TYPE 1 Adhesive

S.No.	Description	Test Result	As per IS-15477:2004 Specification
1.	<b>Dry Condition</b> (14 Days under normal Lab. conditions)	840N	750N
2.	<b>Wet Condition</b> (7 Days under normal Lab. conditions followed by 7 Days Immersion in water)	556N	450N

Shear Adhesion Test

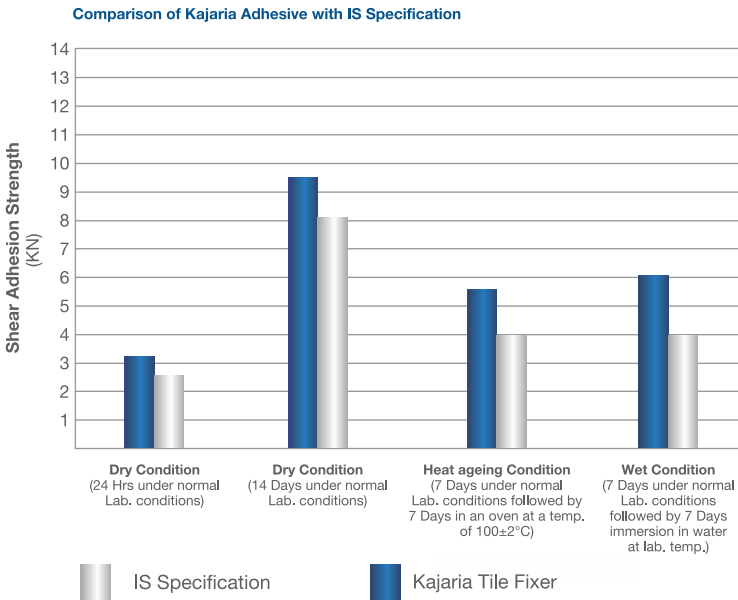


Shear Adhesion Strength (KN)  
for TYPE 1 Adhesive

S.No.	Description	Test Result	As per IS-15477:2004 Specification
1.	<b>Dry Condition</b> (24 Hrs under normal Lab. conditions)	3.1KN	2.5KN
2.	<b>Dry Condition</b> (14 Days under normal Lab. conditions)	9.4 KN	8.0KN
3.	<b>Heat ageing Condition</b> (7 Days under normal Lab. conditions followed by 7 Days in an oven at a temp. of 100±2°C)	5.5KN	4.0KN
4.	<b>Wet Condition</b> (7 Days under normal Lab. conditions followed by 7 Days immersion in water at lab. temp.)	6.0KN	4.0KN

for TYPE I Adhesive

S.No.	Description	Test Result	Declaration
1.	Open time (Min.)	28	Minimum 20
2.	Adjustability (Min.)	25	Minimum 20

All Results are after keeping the material at 5°C to 30°C since one year

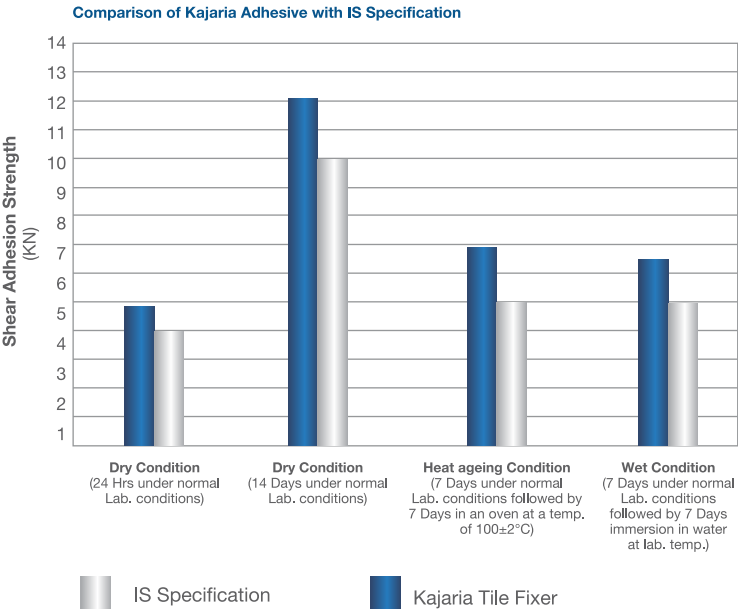

Shear Adhesion Strength (KN)  
for TYPE II Adhesive

S.No.	Description	Test Result	As per IS-15477:2004 Specification
1.	<b>Dry Condition</b> (24 Hrs under normal Lab. conditions)	4.94	Min 4.0
2.	<b>Dry Condition</b> (14 Days under normal Lab. conditions)	12.0	Min 10.0
3.	<b>Heat ageing Condition</b> (7 Days under normal Lab. conditions followed by 7 Days in an oven at a temp. of 100±2°C)	6.9	Min 5.0
4.	<b>Wet Condition</b> (7 Days under normal Lab. conditions followed by 7 Days immersion in water at lab. temp.)	6.5	Min 5.0

for TYPE II Adhesive

S.No.	Description	Test Result	Declaration
1.	Open time (Min.)	30	Min 20
2.	Adjustability (Min.)	27	Min 20

All Results are after keeping the material at 5°C to 30°C since one year



# KE-100

## PREMIUM EPOXY GROUT

### Product Description:

Kajaria **KE-100** is a Stain free Epoxy grout for floors & Walls. It is a color fast, chemical resistant & 100 % solid epoxy grout suitable for Ceramic tiles, Vitrified tiles, marbles and stones, especially in stain prone areas such as kitchens and washrooms (residential & commercial installations). It is non shrinking, fast curing efflorescence free grout. It is ideal for installation where high strength mildew joints are required. It can be steam cleaned and is ideal for green buildings.

### Features

- Simply mix Hardener, resin & filler.
- Excellent under high temperature conditions.
- Beautiful Joints as no effect of pigments.
- Protection against Stains.
- Time Saving.
- Suitable for joints between 2-12 mm .
- Available in 20 colors.



### Pack Size:

	1 Kg.	5 Kg.
Resin	0.2 Kg.	1 Kg.
Hardner	0.08 Kg.	0.4 Kg.
Coated	0.720 Kg.	3.6 Kg.

### Shelf Life:

1 Year in dry unopened condition.

### Applications:

Residences, Kitchens, bathrooms, swimming pools, fountains, hospitals, restaurants, showroom, industrial areas & high traffic areas.

### Advantages:

- Stain free grout for floors & walls.
- Available in range of colors.
- Chemical & Bacterial resistant.
- Enhances look of walls & floors.
- Easy to apply-Smooth & Creamy.
- Easy to clean.
- Uniform color resist blotching.



KE-100

Coverage Chart\*

Joint Width in mm	Tile Size ( Length * Breadth * Thickness in mm)									
	100 x 100 x 3	150 x 150 x 4	200 x 150 x 5	150 x 300 x 6	300 x 300 x 6	450 x 300 x 7	600 x 450 x 8	600 x 600 x 8	600 x 900 x 11	900 x 900 x 12
2	4.38	4.93	4.51	4.38	6.57	6.76	8.45	9.86	8.61	9.8
3	2.92	3.28	3.00	2.92	4.38	4.51	5.63	6.57	5.74	6.57
4	2.19	2.46	2.25	2.19	3.28	3.38	4.22	4.93	4.30	4.93
6	1.46	1.64	1.50	1.46	2.19	2.25	2.81	3.28	2.87	3.28
8	1.09	1.23	1.12	1.09	1.64	1.69	2.11	2.46	2.15	2.46
10	0.87	0.98	0.9	0.87	1.31	1.35	1.69	1.97	1.72	1.97
12	0.73	0.82	0.87	0.73	1.09	1.12	1.40	1.64	1.43	1.64

\* Know the material needed for your site

\*Note:



- Coverage in Sq. Mtr per 1 kg. Material.
- Specific gravity- 1.9.
- As per the actual site the consumption vary accordingly
- These figures are for indicative purpose

GROUT COLOURS

Plain

						
Crema	Champagne	Ivory	Granilia Grey	Almondo	Autumn Yellow	Fiero
						
Brown	Copper Brown	Aqua	Alpine Blue	Rose	Bottle Green	Marble Beige
						
Steel Grey	Cobalt Blue	Chocolate	Black			

Elite Plain

	
Blaco Nieve	Turquoise Blue



# PREMIUM UNSANDED GROUT

## Product Description:

**Kajaria Premium Unsanded Grout** is a superior quality grout. It consist of a carefully prepared blend of cement, chemical additives and fillers. It is easy to install – just mix with water and use. **It is ideal for both floors and walls applications.**

## Pack Size:

1 kg

## Shelf Life:

1 year in dry unopened pouches.

## Applications:

Used for filling tile joints with width 1mm to 3 mm in both interior and exterior areas for ceramic & vitrified tiles.

## Advantages:

- Water resistant
- Improved efflorescence control
- Smooth finish
- Weather resistant
- Easy maintenance
- Non-shrinking
- Non-cracking
- Easy application and clean up
- Available in 20 colors.




*Kajaria Premium grouts are suitable for a vast array of tile types and applications, including natural stone, porcelain, conglomerate and ceramic tiles.*

## GROUT COLOURS

### Plain



### Elite Plain



## COVERAGE

Coverage (in sq. ft.): approximate coverage/10 Kg. grout

Tile Size x thickness (in mm)	1 mm	2 mm	3 mm
100 x 100 x 3	1430	720	480
150 x 150 x 4	1610	810	540
200 x 150 x 5	1470	740	490
200 x 200 x 5	1720	860	570
200 x 300 x 6	1720	860	570
300 x 300 x 6	2150	1070	710
400 x 400 x 6	2860	1430	950
450 x 450 x 7	2760	1380	920
500 x 500 x 8	2680	1340	890
600 x 600 x 8	3210	1610	1070



NEW

Introducing

**TILE CLEANER TC1****Product Description:**

**Kajaria Tile Cleaner TC1** is a fast acting acid based cleaner for regular cleaning of dirt and stains on tile surface, designed for daily maintenance of tiles.

**Pack Size:****750 ml**Carton of 14 Bottles  
**10500 ml****1 Litre**Carton of 10 bottles  
**10000 ml****Shelf Life:**

1 year

**Applications:**

for interior & exterior application of tile surfaces

- Shake the bottle and pour TC1 on the surface which is stained.
- Allow it to stand for 2-3 minutes so as to allow it to react with the stain.
- Rinse it with water and repeat procedure if needed.

**Caution:**

- Please note that this is an acidic based cleaner and hence care should be taken while using the same.
- Please wear hand gloves, nose cover and wear eye protection before and while using the product.
- **KEEP OUT OF REACH OF CHILDREN**

**Features**

- For ceramic & vitrified tiles.
- Removes tough stains.
- Use directly or add water.
- Ideal for interior & exterior.
- Anti Germs & Anti Stains.



***Kajaria***





NORTH

CHANDIGARH :

SCO 17, 1st Floor  
Sector-7C, Madhya Marg, Chandigarh.  
Phones : 91-172-4631418, 4631415  
E-mail : chandigarh@kajariaceramics.com

DEHRADUN :

485, Dharampur, Haridwar Road, Dehradun  
Phone : 0135-2675329, 09760044701  
E-mail : dehradun@kajariaceramics.com

DELHI :

J1/B1 (Extn.), Mohan Co-op Industrial Estate,  
(Opp. Badarpur Thermal Power Station),  
Mathura Road, Badarpur, Delhi - 110044  
Phone : +91-11-26946409  
E-mail : info@kajariaceramics.com

JAMMU :

Satyam Road, Trikuta Nagar,  
Jammu - 180012, Jammu and Kashmir  
Phone - +91-191 247 6300

JAIPUR :

Ground Floor, Nidhi Kamal Tower,  
Plot No 37-38 B, Barwara House,  
Ajmer Road, Jaipur - 302006, Rajasthan  
Phone : 0141-2222955, 2220244, 09799495769  
E-mail : jaipur@kajariaceramics.com

LUDHIANA :

Dhanraj Complex, Fourth Floor,  
Above Oriental Bank of Commerce,  
Near PAU Gate No. 2, Ferozpur Road  
Ludhiana-141001, Punjab  
Phone : +91-161-4649002  
E-mail : ludhiana@kajariaceramics.com

LUCKNOW :

Plot No. 48 & 51, Shop/ CC, Tara Market,  
Sanjay Gandhi Puram, Faizabad Road  
Lucknow - 206016 (U.P.)  
Phone : +91-522-4029181 / 4024516  
E-mail : lucknow@kajariaceramics.com

VARANASI :

Varanasi Trade Centre, Plot No.154/2A,  
1st Floor, Near Income Tax Office  
Maqbool Alam Road, Varanasi- 221002  
Phone : 0542-2500483  
E-mail : varanasi@kajariaceramics.com

WEST

AURANGABAD :

Plot No. 300, 10/3, N-3, CIDCO,  
Opp. Ramgiri Hotel,  
Jalna Road, Aurangabad - 431003  
Phone : 0240-2486655  
E-mail : aurangabad@kajariaceramics.com

MUMBAI :

B1 - 307, Boomerang,  
Chandivali Farm Road, Near Chandivali Studio,  
Off Saki-vihar Road, Andheri (E), Mumbai - 400072  
Phone : 022-61433100  
Fax : 022-61433111  
E-mail : mum@kajariaceramics.com

NAGPUR :

Prathmesh Raja Apartment  
Above Bank of Baroda, Unthkhana Road,  
Medical Square, Nagpur-440009, Maharashtra  
Phone : 0712-2755440  
E-mail : Nagpur@kajariaceramics.com

PUNE :

601-A, D.S.K. Gandharv Heights,  
Ganesh Khind Road, Shivaji Nagar,  
Pune - 411005  
Phone : 020-66471600  
Fax : 020-66471603  
E-mail : pune@kajariaceramics.com

EAST

KOLKATA :

Tirupati Plaza, 2nd Floor  
74/2, Acharya Jagdish Chandra Bose Road,  
Kolkata- 700016, West Bengal  
Phone : 033-40231111  
E-mail : kol@kajariaceramics.com

SOUTH

BANGALORE :

Farah Icon, 119 First Floor,  
Opp. New Pass Port Kendra,  
Lalbagh Road,  
Bangalore - 560 027, Karnataka  
Phones : 08041440019 / 20 / 30

CHENNAI :

Fagun Chambers, Old No: 7,  
New No: 26A/2, 1st Floor, Ethiraj Salai,  
Egmore, Chennai - 600008, Tamil Nadu  
Phones : 044-42691094/ 28264990  
E-mail : chn@kajariaceramics.com

COCHIN :

MN Square, 2nd Floor, 549/2,  
Near Gold Souk Grande  
NH Bypass, Vyttila, Cochin- 19, Kerala  
Phones : 0484-2912000  
E-mail : coc@kajariaceramics.com

COIMBATORE :

1st Floor, 57, Cowley Brown Road,  
Near Central Library, R.S.Puram,  
Coimbatore - 641002, Tamil Nadu  
Phones : 0422-4350801/4350803  
E-mail : coimbatore@kajariaceramics.com

HYDERABAD :

Uma Aishwarya House, H.No 8-2-502/1/AG,  
Road No. 7, Banjara Hills,  
Hyderabad - 500034, Telangana  
Phone : 040 - 66106058  
E-mail : hyderabad@kajariaceramics.com

VIJAYWADA :

61-3/4-1, 1st Road, Geetha Nagar,  
Beside SBI Bank, NH-5, Balaji Nagar,  
Krishna Lanka, Vijaywada-520013,  
(Andhra Pradesh)  
M: 9000015173, 9000005389

For enquiry regarding Adhesives, Grouts &  
Tile cleaner, Please Contact

**Dinesh Kumar**

Assistant Manager Kajaria Ceramics Limited

**Mob. 9315902326**

**Kajaria Ceramics Limited**

Corporate Office: J1/B1 (Extn.), Mohan Co-op Industrial Estate, Mathura Road, New Delhi - 110044, Ph.: +91-11-26946409, Fax: +91-11- 26946407

Regd Office: SF-11, Second Floor, JMD Regent Plaza, Mehrauli Gurgaon Road, Village Sikanderpur Ghosi, Gurgaon-122001, Haryana, Ph.: +91-0124-4081281

CIN No. : L26924HR1985PLC056150, E-mail: info@kajariaceramics.com, Web.: www.kajariaceramics.com

facebook.com/KajariaCeramicsLimited twitter.com/KajariaCeramic, Tollfree : 1800-11-2992

Download Kajaria App

